


# QRT Booster Bottom Entry

## Scope of Use / Specification Sheet

QRT Bottom Entry Boosters provide a point of attachment for fire brigades to provide additional water to a fire hydrant system in the event of an emergency. QRT Boosters are available in all thread types to suit each state requirement.

Assembled, manufactured and tested in Brisbane, Australia.

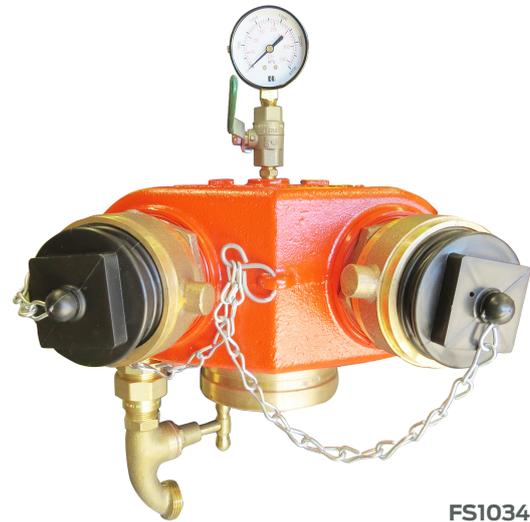

FS1034



### Parts List

Item	Qty	Part Number	Description
1	1	01027-04	Hex Nipple R $\frac{1}{4}$ " M
2	1	47026-04DR	Ball Valve $\frac{1}{4}$ Brass Mini M/F
3	1	50510G	Union Barrel DN20 M-F BSPP
4	1	FR0447	Booster RG BTM Entry S/ASSY
5	1	FR0460	Gauge Pressure 32mm x 2500kPa
6	2	FR0587	65 QRT Ring Mach GM
7	2	FR0590	Short Tail 65mm
8	1	FR1158	Hosecock DN20 x DN25 Outlet Inverted – AS 3718
9	2	FR1250	Washer 65QRT Neoprene
10	2	FS2282	Plug 65QRT 10 2 FS2282 Plastic Complete

### Dimensions

Model	A	B	C
FS1034	230	398	303

Note: All measurements in mm unless otherwise stated.

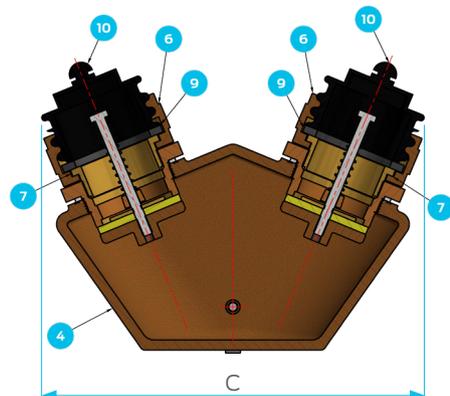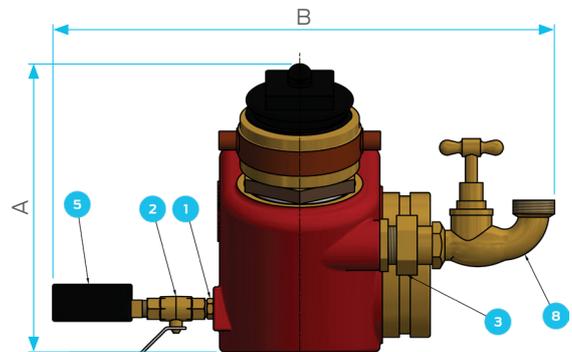

### Standards and Approvals

All Boosters are manufactured and approved to AS 2419.3.